

Rain water harvesting (RWH): a supplement to domestic water supply in Mvog-Betsi, Yaoundé-Cameroon

Andrew Ako Ako^{a,*}, Coretta T. Nzali^b, Lydia Likowo Lifongo^c and George Elambo Nkeng^b

^aHydrological Research Centre Yaoundé, P.O Box 4110, Yaoundé, Cameroon

^bNational Advanced School of Public Works Yaoundé, P.O. Box 510, Yaoundé, Cameroon

^cDepartment of Chemistry, University of Buea

*Corresponding author. E-mail: akoandrewako@yahoo.com

ABSTRACT

This research is aimed at assessing the possibility of using a Rain Water Harvesting (RWH) system to supplement domestic water supply in the Mvog-Betsi neighborhood of Yaoundé. The research made use of a 63 year long data series on the amount of rainfall available in the study area, an analysis of rainwater quality and an estimate of the population's monthly water demand in relation to the monthly harvestable rainwater supply. Rain water supply for the months of September, October and November is 53.05 m³ which is largely greater than the household's water demand of 25.56 m³ during the long dry season. This led to the design of a 27 m³ ferrocement tank as minimum storage requirement. Furthermore, the rainwater quality analysis showed that all tested parameters conform to water quality standards except for the microbiological quality. The rain water needs to be disinfected before consumption as potable water. Finally, cost estimates for installing RWH systems for low (\$419), medium (\$549) and high standard (\$668) habitations were calculated. RWH can effectively serve as a water supply supplement in the Mvog-Betsi neighborhood.

Key words: Cameroon, domestic water supply, Mvog-Betsi-Yaoundé, rain water harvesting, supplement

HIGHLIGHTS

- Rainwater Harvesting is a supplement to urban water supply.
- Access to domestic water in Yaounde is problematic.
- There is abundant rainwater in Yaounde.
- Rainwater quality in Yaounde is chemically fit for drinking but not bacteriologically.
- Rainwater in Yaounde can be used for other domestic uses.

1. INTRODUCTION

Rainwater harvesting (RWH), is defined as the collection of water from surfaces on which rain falls, and subsequent storage of this water for later use (Sustainable Earth Technologies 1999). Researchers employ a wide variety of terms and definitions to describe the various methods aimed at using, collecting and storing rain runoff in order to increase the availability of water mainly for domestic and agricultural uses in arid and semi-arid areas (Haut *et al.* 2015). Yannopoulos *et al.* (2016) defined rainwater harvesting as an umbrella term for a range of methods of concentrating and storing rainwater runoff, including from roofs (rooftop harvesting), the ground (runoff harvesting) and from channelflow (flood water harvesting), from various sources (rain or dew) and for various purposes (agricultural, livestock, domestic water supply, environmental management). According to Antoniou *et al.* (2014), rainwater harvesting is the collection of atmospheric precipitation, usually collected and stored in artificial reservoirs known as cisterns in order to be used for household purposes such as bathing and washing, as well as irrigation and other urban uses and after appropriate treatment to be used in dwellings, offices, housing estates, industry, horticulture, and parks. Rainwater harvesting for supplying drinking water in urban areas has a long history especially in semi-arid areas. Decentralized multi-purpose rainwater harvesting systems should be useful infrastructure to mitigate water-related disasters such as flooding, sudden water break and fire events, especially in highly developed future urban areas in the future. A cost-effective and environmentally friendly solution to flood risks due to urbanisation is the harvesting and reuse of stormwater runoff, in general, and particularly from roofs (Pazwash 2016).

This is an Open Access article distributed under the terms of the Creative Commons Attribution Licence (CC BY 4.0), which permits copying, adaptation and redistribution, provided the original work is properly cited (<http://creativecommons.org/licenses/by/4.0/>).

While there are some disadvantages to harvesting rainwater, (dependency on climatic patterns, storage capacity limitations, requires regular maintenance, incurs high cost initially and contamination from poor collection and storage methods) these disadvantages can be avoided with proper planning and management. The flexibility and the many benefits (avoids many surface-water pollutants, cost effective: reduces water bills and running costs are low, is a simple yet flexible technology : local people can be trained to build, operate and maintain a RHW system, water can be delivered nearer or directly to the household, relieving the women and children from the burden of carrying it, saving time and energy, does not depend on terrain, geology, or infrastructure managementschemes) associated with rainwater harvesting make it a welcomed, widely accepted, and increasingly-promoted alternative for the water demands of today (United Nations Environmental Program 1997; International Rainwater Catchment Systems Association 2021).

Although 95% of those living in urban areas worldwide are served by improved water supply (WHO/UNICEF/ JMP 2015), there are still a great number of people who live in informal, overcrowded peri-urban settlements where access to water is low. As a result, there are many cases where rainwater collection provides an important supplementary source of domestic water (CAWST 2011).

According to WHO/UNICEF (2012), Sub-Saharan Africa has the lowest water supply coverage, with only 61% of its population having access to improved water supplies. It is estimated that 50% of Africa's population will be affected by water stress by 2025 (Malley *et al.* 2009). The root causes are ineffective governance, underinvestment, and mismanagement, which result in the absence of infrastructure to provide water access (Steven *et al.* 2014). In Cameroon for instance, though being a country blessed with vast bodies of water, many peri-urban communities and suburbs are water stressed, confronted to the issue of lack of access and continuous availability of water supply for their daily domestic and drinking water needs. This is the case of the Mvog-Betsi neighborhood in Yaoundé, capital of Cameroon.

The availability of potable water in the Mvog-Betsi neighborhood is really a cause of concern as majority of the population tend to rely on groundwater resources to meet their daily domestic water needs. This is as a result of the fact that the water distribution network has been established in only few Blocs (Bloc I, V, VI and VII), out of a total of nine Blocks which make up the neighborhood. These groundwater resources including springs and wells tend to reduce in flow rate or dry up during the dry periods of the year. Boreholes on their part, though more resilient to climate or seasonal changes are expensive to construct, the pumps are more difficult to maintain and hence frequently breakdown (GWP & MINEE 2009). It is of great necessity therefore, to strive to remedy or attenuate the prevailing situation in this neighborhood of the capital city of Cameroon. In this regard, Rainwater Harvesting (RWH) presents an alternative solution in the short to medium term in view of providing a better-quality supplement for domestic and potable uses to the Mvog-Betsi population.

This paper, therefore, is aimed at demonstrating how RWH through roof catchment systems could act as a domestic water supply supplement to the inhabitants of this neighborhood of Cameroon's capital city.

2. MATERIALS AND METHODS

2.1. Study area

The Mvog-Betsi neighbourhood also known as Eba'a is located in Yaoundé, capital of Cameroon, more precisely in the Yaoundé VII Sub Division (Figure 1). It extends from 3°51'19" and 3°52'00" N to 11°28'09" and 11°29'20" E and has an approximate surface area of 1.54 square kilometres, and comprises of nine Blocs. The Mvog-Betsi neighbourhood is bounded to the North by Melen, to the South by Etoug Ebé, to the West by Cité Verte and to the East by Biyem-Assi and Obili neighborhoods (GMUS 2008; Ndongo *et al.* 2012). The neighborhood comprises of nine Blocs, however, five of these are of interest in this study (i.e. Blocs II, III, IV, VIII and IX), where the urban water supply network is either completely absent or no longer functional.

The climate in Mvog-Betsi is the Equatorial climate of the Guinean type as in all of Yaoundé city marked by 4 seasons (a long rainy season from mid-September to mid-November, a long dry season from mid-November to mid-March, a short rainy season from mid-March to mid-June and a short dry season from mid-June to mid-September) (Suchel 1998). The average monthly precipitation data of Yaoundé for a period of 63 years (1951–2013) is presented in Figure 2 below.

One of the first steps in deciding if rainwater harvesting is an appropriate technology is to estimate the potential rainfall supply to make sure that it meets the household needs. If used for rooftop harvesting, an annual rainfall of at least 100–200 mm is required in order to meet the water demand of 50–150 litres per day for residents in developing countries as proposed by UNESCO in 2000 (CAWST 2011).

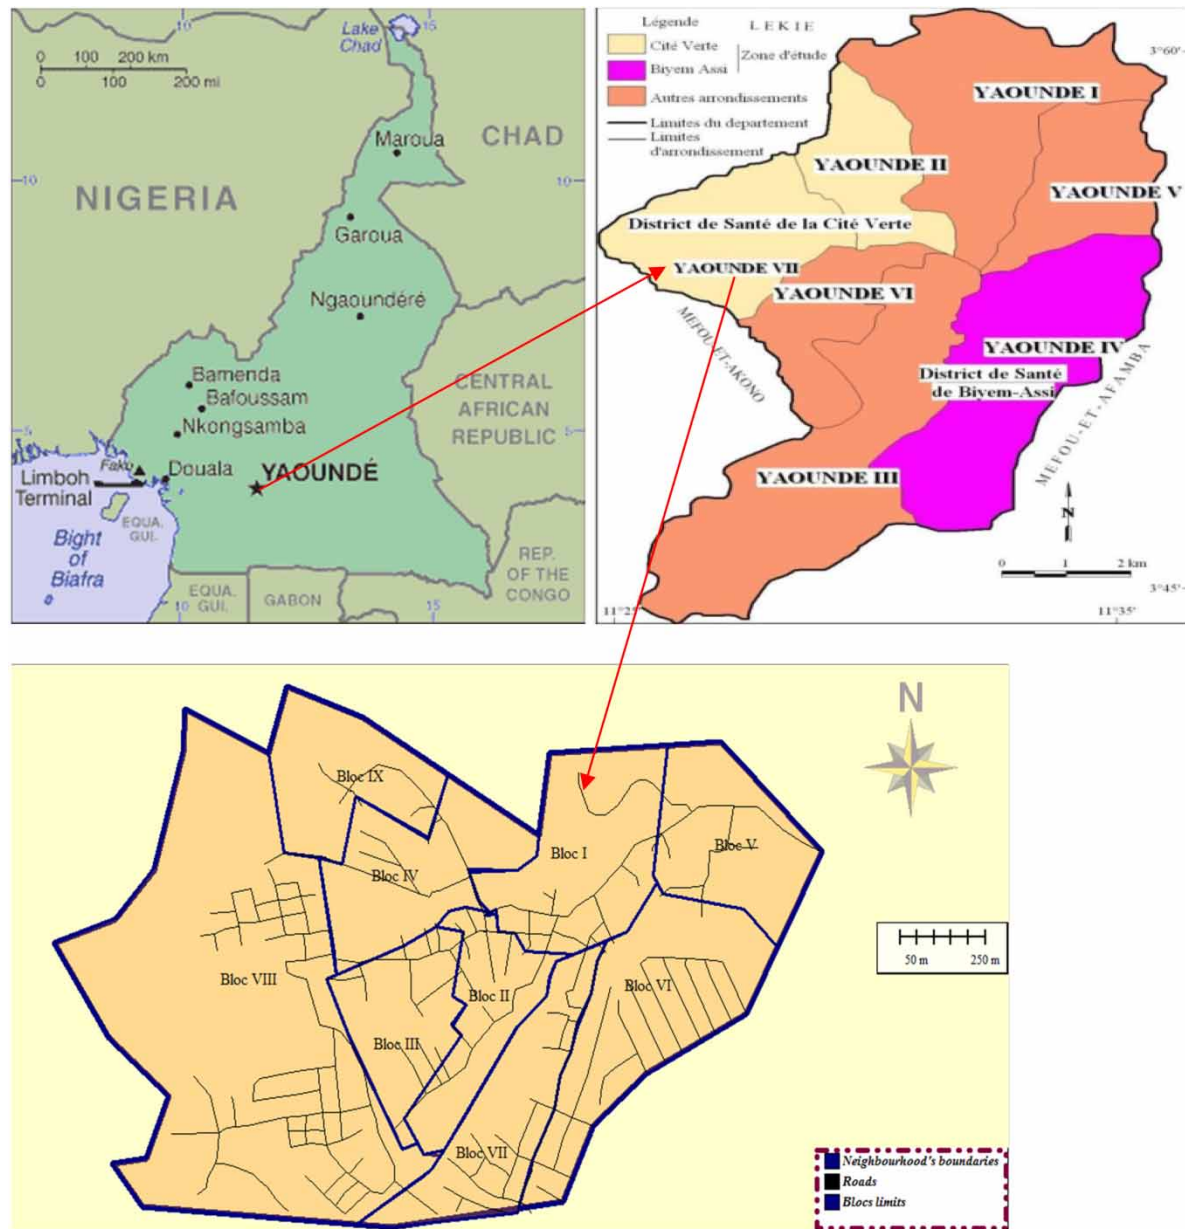


Figure 1 | Location of the study area.

In Yaoundé, the Mvog-Betsi neighbourhood included, rainfall is recurrent in the months of March, April, May and June for the short rainy season and in the months of September, October and part of November for the long rainy season. The rainiest months are October and September with 620 and 512 mm respectively and the mean monthly rainfall depth is about 300 mm. An annual rainfall of at least 100–200 mm is required for rooftop harvesting (CAWST 2011). Thus, RWH through roof catchment systems could act as a domestic water supply supplement to the inhabitants of Mvog-Betsi neighborhood.

2.2. Data collection

2.2.1. Household survey

The feasibility of rainwater harvesting in a particular locality is highly dependent upon the amount and intensity of rainfall. Other variables, such as catchment area and type of catchment surface, usually can be adjusted according to household needs. As rainfall is usually unevenly distributed throughout the year, rainwater collection methods can serve as only

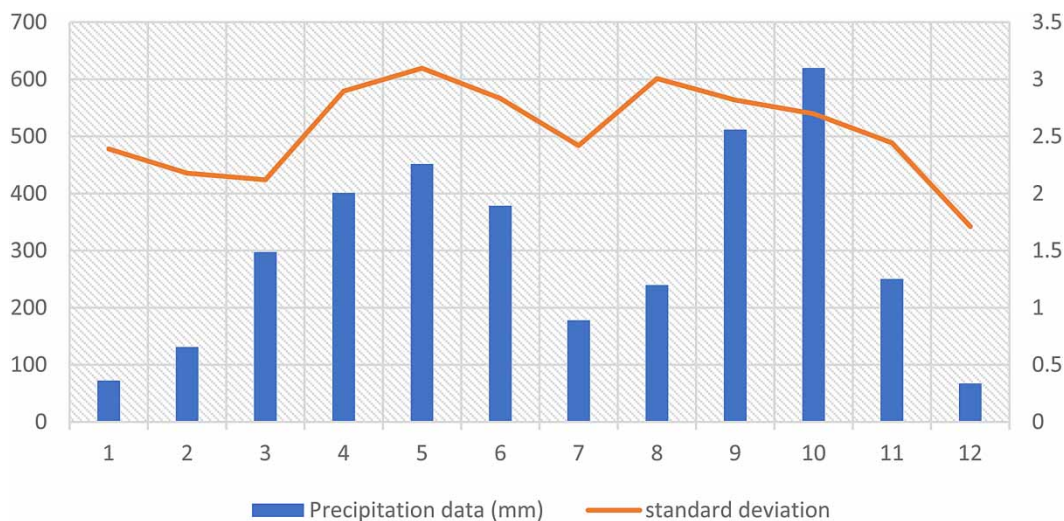


Figure 2 | Average monthly precipitation (1951–2013) of Yaoundé. *Source:* National Meteorology Service Yaoundé.

supplementary sources of household water. The viability of rainwater harvesting systems is also a function of: the quantity and quality of water available from other sources; household size and per capita water requirements; and budget available. The decision maker has to balance the total cost of the project against the available budget, including the economic benefit of conserving water supplied from other sources. Likewise, the cost of physical and environmental degradation associated with the development of available alternative sources should also be calculated and added to the economic analysis.

A survey should be the starting point to estimate the household water demand. There are several variables that affect domestic water consumption, such as the: number of adults and children (i.e. adults use more water than children); family members staying at home (i.e. absentee members working or studying away from home for part of the year); time of year (i.e. more water is used during the hottest and driest seasons). When water supplies become more consistent and there is a great volume of water available to users, the amount that is used tends to increase.

To obtain information on water demand, other sources of potable water, rainwater harvesting practices, habitat types and roofing materials in the neighbourhood, a household survey was carried out. This survey was carried out using a questionnaire administered to 250 households in the neighbourhood. The study focused on the following Blocs in the neighbourhood; Blocs II, III, IV, VIII and IX. The sampling technique which was used was cluster sampling. Households of the neighbourhood's Blocs were grouped into clusters, then a random sampling of the houses to be surveyed per cluster was made. This sampling technique generally best-suits personal interviews as it can render the sampling procedure easier and increase efficiency of field work. It also allows for an extrapolation of results across a given cluster.

2.2.2. Rainwater sampling and laboratory analysis

Microbial and chemical contaminants have been detected in Domestic Rain Water Harvesting (DRWH) tanks, and if this water is used for potable purposes, it could produce adverse health effects. Microbial and chemical contaminants in DRWH tanks can originate from: (i) raindrops that traverse through polluted air, (ii) catchment areas, and (iii) storage tanks (Abbasi & Abbasi 2011; de Kwaadsteniet *et al.* 2013).

Rainwater collection systems are commonly believed to provide safe drinking water without treatment, because the collection surfaces (roofs) are isolated from many of the usual sources of contamination (Mosley 2005). Thomas & Martinson (2007) further explain that when considering the water quality of a RWH system, it is useful to observe the complex path a contaminant must follow in order to enter a human being. The usual paths are shown in Figure 3.

The primary means of tank contamination is through water washed in from the roof. Material washed in from the roof can come from several sources: material that has accumulated on the roof or is blown onto the roof during a storm, decayed roof materials (e.g. low-quality roof materials such as thatch or tar sheets) can contribute to the dirt load and passage of water along unclean gutters may add further debris.

To ascertain the quality of rainwater in the Mvog-Betsi neighborhood, 10 rainwater samples were collected in the months of September, October and November 2018 in 1.5 litres plastic bottles placed on a stand directly under corrugated iron sheets

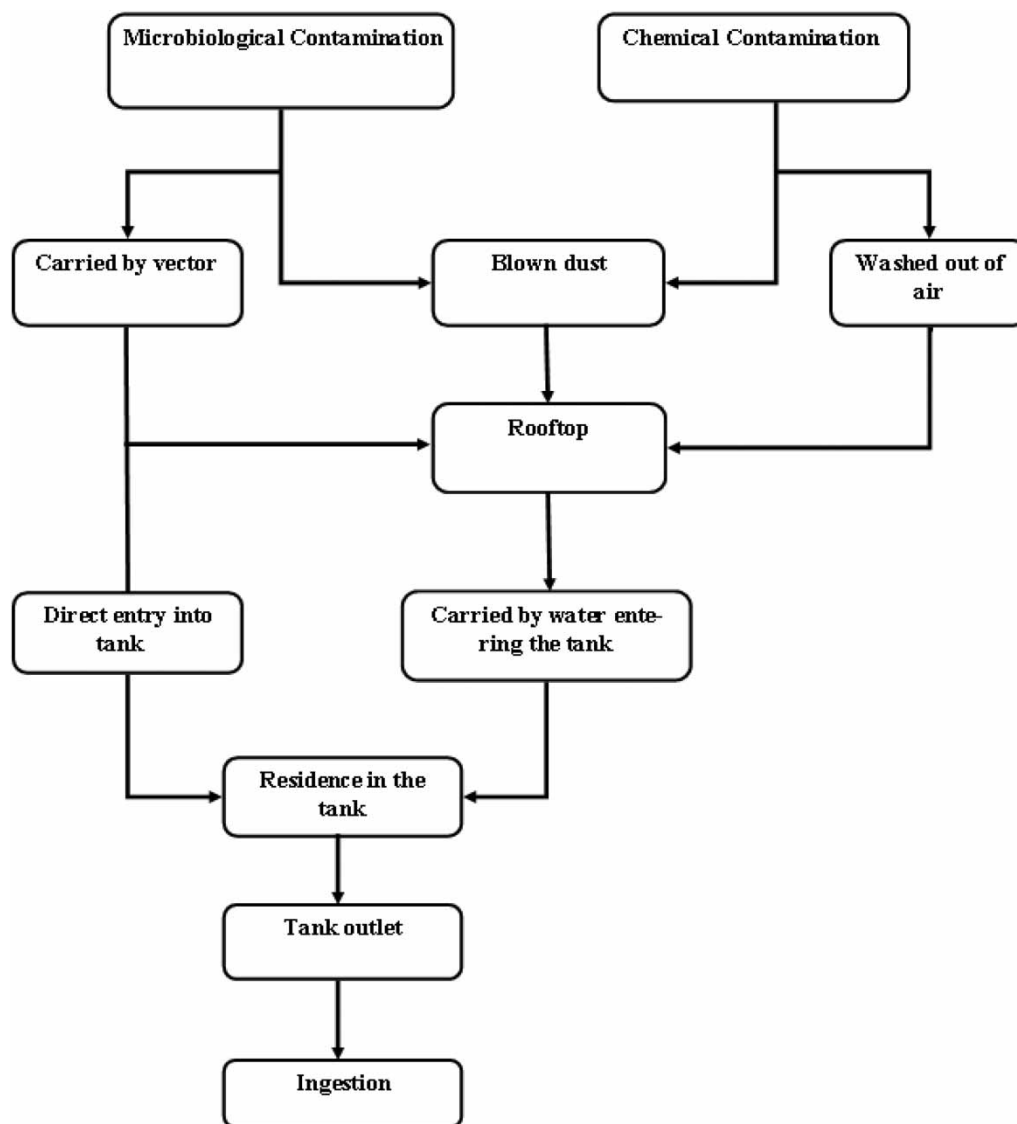


Figure 3 | Contamination paths for roof water harvesting Source: Thomas & Martinson 2007.

roof-endings of the houses surveyed. The bottles were first thoroughly rinsed several times with distilled water ensure they were free from contamination and then filled with the rainwater sample to be collected. Samples were then preserved airtight (in order to minimize oxygen contamination and the escape of dissolve gases) and kept in a refrigerator prior to analysis for a period of 1 day after collection. Samples were transported and deposited at the Geochemical Water Analysis laboratory (LAGE) of the Institute for Mining and Geological Research (IRGM) Yaoundé for chemical analysis and bacteriological analysis (Total Coliform and Feecal Coliform Counts) at the Animal Biology Laboratory of the University Yaoundé I.

2.2.3. Methods for designing a rainwater catchment system

Usually, the main calculation when designing a rainwater catchment system will be to size the water tank correctly to give adequate storage capacity. Often the only variable that a designer can influence is the tank size since existing roofs are used as catchments and the amount of rainfall cannot be changed (CAWST 2011). When sizing the system, it is important to consider whether it is going to be used in conjunction with other water sources as a supplementary, partial or backup supply.

According to CAWST (2011), there are a number of different sizing methods which vary in complexity and sophistication, such as the dry season demand method, the graphing method and the computer models methods. The Dry Season Demand

Method estimates the largest storage capacity needed to meet the household water demand throughout the dry season (i.e. period during which there is no significant rainfall). It has as disadvantages that: only provides a rough estimate of tank size; only suitable in areas where a distinct dry season exists; does not consider rainfall availability and variations between different years; does not consider capacity of the catchment area. Graphing the catchment runoff and daily water demand is another simple method that will give a more reasonable estimation of the storage requirements. This is important in areas with low or uneven rainfall, where more care has to be taken to size the storage tank properly. During some months of the year, there may be an excess of water, while at other times there may be a deficit. If there is enough total rainfall throughout the year to meet the demand, then sufficient storage will be required to bridge the periods of water scarcity. The basic steps that have to be followed under this method are: 1. Plot a bar graph of the average monthly water supply (i.e. runoff) and add a line showing the average monthly water demand. 2. Use a table to calculate the cumulative water supply and demand. 3. Plot a bar graph of the cumulative water supply. Add a line showing the cumulative water demand. The difference between these values indicates the minimum storage requirement. Computer models can be used to simulate rainwater supplies and design storage requirements. The output can compare the performance of specific designs under various water demand scenarios. The results of any simulation exercise should always be treated with some caution since they are only as good as the historic rainfall data entered into the model.

3. RESULTS AND DISCUSSION

3.2. Rainwater quality

The result of the chemical and bacteriological analysis of rainwater in the Mvog-Betsi neighborhood is shown on Table 1.

It can be observed on Table 1 that rainfall in Mvog Betsi has an average pH of 6.25 though an urban area but within the WHO (2004) and Cameroon (ANOR 2003) potable water standards.

The major cation in the rainwater samples is potassium with 26.56 mg/l whereas the major anion is bicarbonate (HCO_3^-) with a value of 54.78 mg/l (Table 1). However, it is clear that all tested parameters conform to set water quality standards by both the WHO and Cameroon. These results also confirm the fact that rainwater is not very rich in mineral content, thus can be described as being soft, since the ions responsible for water hardness (Ca^{2+} , Mg^{2+} and HCO_3^- in this case) are in very little amounts compared to the standards. A little exception is seen at the level of Potassium (K^+) ion in which the ion concentration is greater than that of the Cameroon potable water standard. The adverse effect of the high (K^+) ion is a health condition called hyperkalaemia (WHO 2009). However, the WHO prescribes a greater value which can conveniently be

Table 1 | Results of chemical and bacteriological analyses of rainwater in compliance with WHO (2004) and Cameroon (ANOR 2003) potable water standards

Parameter	Unit	Rainwater results $n = 10$	Standard deviation	WHO Limits (2004) (\leq)	Cameroon potable water standard (ANOR 2003) (\leq)
pH	–	6.25	0.45	Between 6.5 and 8.5	Between 6.5 and 9
Electrical Conductivity	$\mu\text{S}/\text{cm}$	57.75	34,13	NA	1000
Suspended Solids	mg/l	0		NA	NA
Ca^{2+}	mg/l	11.16	9,28	75	NA
Mg^{2+}	mg/l	0.39	0,22	30	50
Na^+	mg/l	0.19	0,04	200	150
K^+	mg/l	26.56	36,17	50	12
Cl^-	mg/l	15.34	16,65	250	NA
F^-	mg/l	0.05	0,04	1.5	0.7/l
HCO_3^-	mg/l	54.78	13,29	200	250
PO_4^{3-}	mg/l	0.01	0,01	NA	5
Total Coliform Count	CFU	100	25	0	0
Feacal Coliform Count	CFU	50	31	0	0

Note: NA: not applicable.

used. Particularly in urban areas, pollutants such as heavy metals and sulphates can enter the water and these materials have been found in several studies in urban roof runoff (de Kwaadsteniet *et al.* 2013).

The World Health Organization (WHO 2004) guidelines state that faecal bacteria should not be detectable per 100 mL of sample. However, Fujioka (1994) stated that a more realistic standard may be 10 faecal coliforms/100 mL. Total coliform tests are not considered a reliable indicator of risk to human health in the tropics as they are naturally present and can reproduce in the soil and water (Fujioka 1994; WHO 2004), meanwhile faecal coliforms and enterococci are considered much better indicators of faecal contamination, since these are commonly found in high numbers in human and animal faeces. Their presence in drinking water, therefore, indicates a strong likelihood that faecal contamination has occurred and that the water is therefore not suitable for drinking. Table 1 reveals that rain water in Mvog Betsi is contains on average 100 Total Coliform bacteria and 50 Faecal Coliform bacteria. This rain water is feacally contaminated and therefore not fit for drinking but fit for other domestic uses. The rain water needs to be disinfected before consumption as potable water.

3.3. Rainwater use in the studied community

3.3.1. Water demand

The estimated water demand for household daily activities and personal needs is around 30–40 litres per capita per day (lpcd). This amount is seen to increase during the dry seasons where more water is needed for bathing and consumption (WHO/UNICEF/JMP 2015). WHO/UNICEF/JMP (2015) goes further to define basic access as the availability of a water source that is at most 1,000 metres or 20 minutes away that affords the possibility of reliably obtaining at least 20 litres per day per family member allowing for consumption, hand washing and basic hygiene, but it doesn't guarantee laundry or bathing and therefore impact on health can be notable; Intermediate access refers to the situation where people have access to 50 litres per day at a distance less than 100 metres or 5 minutes, covering laundry and bathing as well as basic access uses, having low impact on health; meanwhile optimal access allows for the consumption of 100 litres per person per day on average, supplied continuously through multiple taps and which meets all consumption and hygiene needs.

Results of the household survey indicate that the water demand per capita per day in the households of the neighbourhood is as follows: 15–25 L (30%), 25–40 L (35%), 40–60 L (22%), 60–75 L (9%) and 80 L+ (4%). Hence, most inhabitants (35%) use between 25 and 40 lpcd for their entire domestic and potable water needs. However, this amount increases during the dry season by about 15 litres as more water is needed during hot periods.

Based on the WHO/UNICEF/JMP (2015) criteria, water demand in the Mvog-Betsi neighbourhood can be ranked under intermediate access even though the distance covered to the water source is greater than 100 meters and the topography of the zone does not permit easy access to water points.

3.3.2. Potable water and non-potable supply coverage in the neighbourhood

According to the household survey results, 32% of the households fetch their potable water from private dug wells (Figure 4). This is followed by rainwater and springs with 24 and 11% respectively, while community standpipes and house taps are used by 7 and 5% of the households as potable water source.

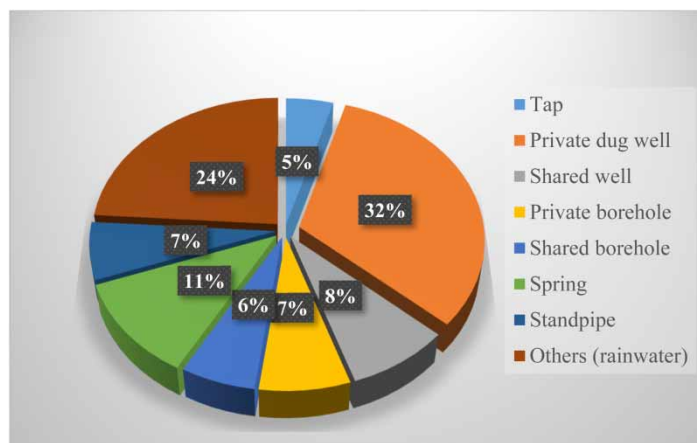


Figure 4 | Potable water and non-potable supply coverage in the neighbourhood.

Private dug wells are the most used as potable water supply source in the study area. This is because dug wells are less onerous in their construction and maintenance than other structures like boreholes. In addition, the less financially well-off people cannot drill water boreholes for their domestic purposes as the cost of drilling the boreholes are prohibitive (Okpoko *et al.* 2013).

The Mvog-Betsi Eba'a neighbourhood, in spite of its more than five decades of existence, is practically excluded from the conventional urban water supply service due to its high-altitude position above all of the Yaoundé city water reservoirs. Thus, the neighbourhood has a very low pipe borne water access estimated to about 13.1% (ERA 2013). As a result, access to potable water is a key issue in certain parts of the neighbourhood including Blocs II, III, IV, VIII and IX. Only 5% of the surveyed population do receive pipe-borne water to their homes. Others are connected to the water supply network but do not receive water because these houses are located at a geographically more elevated point which does not favour gravitational flow of water from the reservoirs to their homes.

Though rain water is one of the most main sources of water for non-potable uses in the neighbourhood, it cannot solely meet the water demands of the population as the rudimentary techniques used in its harvesting does not permit its effective collection. Results of the survey show that about 58% of the population do practise RWH. However, 78% do carry out RWH in a rudimentary way owing to the fact that they do not have sufficient funds to buy a suitable reservoir and fit appropriate gutters to their roofs. 22% of households have well-elaborated systems and this is in great part for households with household heads having high level of education and/or a certain financial strength. The fact that the greater proportion of the population practise RWH in a primitive way can be explained by the fact that constructing or buying a storage tank is onerous. Thomas & Martinson (2007) asserted that the storage tank usually represents the largest capital cost of a domestic rainwater harvesting system, and also that the tank or jar used to store water in a roofwater harvesting system is usually its most expensive component. The population mainly use the harvested RW for non-potable needs including bathing and household chores (that is, dish washing, laundry, mopping the floor, washing of vehicles, watering of plants and flushing of toilets), while the potable RW uses include cooking and drinking, as presented in Figure 4.

3.3.3. Rainwater harvesting practices in the neighbourhood

RWH is very currently practiced in the Mvog-Betsi neighbourhood, particularly in areas where access to and availability of alternative water sources is problematic. Out of the 250 households subjected to the survey, 166 practice RWH. However, most of these households practice this in a very rudimentary or archaic way, owing to financial constraints. That is, some use old metal sheets folded into a semi-circular structure, then hastily attached or fixed to their roofs as means of gutters and one or more barrels placed at the gutter end on the ground to collect rain water. Meanwhile other houses do not even have gutters to convey water; runoff from roof falls directly into receiving container (usually a bucket). On the other hand, households which are financially well-off have well-elaborated RHRW systems including gutters, downpipes and reservoir (though not properly designed). (Figure 5(a)–5(c)).

Furthermore, most inhabitants (164 households) do not perceive RW as potable and thus use it mainly for non-potable domestic purposes including laundry, mopping the floor, washing of vehicles and washing of plates. However, 44 households consider rainwater as potable and use it for bathing, cooking and drinking. These households mainly treat their roof-harvested rainwater with either chlorine or bleach before drinking.

3.3.4. Habitat types and house roofing materials in the neighbourhood

In the Mvog-Betsi neighbourhood a variety of habitat types are found though the most wide-spread are the low standard houses which make up 52% of the houses, followed by the medium standard houses (38%) and 10% are high standard houses (Figure 6(a)–6(c)).

The prevailing roof material in the Mvog-Betsi neighbourhood is corrugated aluminium sheets which are found in 78% of the surveyed houses while galvanised sheets make up 9%. Corrugated aluminium sheets are very affordable, easy to obtain and maintain, thus is very much preferred by the local population. Metal sheet roofs are very smooth and are less likely to retain contaminants such as dust, leaves and bird droppings than rougher material types such as concrete tile roofs. Corrugated aluminium sheets also get hot enough in the Tropics, which helps in the disinfection of the rainwater (Mosley 2005).

Forty six percent of the surveyed houses have gutters on their roofs; out of this 46%, 40% of the gutters are used for RWH purpose while 60% is used for drainage. Of the 40% used for RWH, 30% of the households have strived to provide good gutter configurations for their houses while 70% remaining have resorted to rudimentary ways of installing gutters on their roofs.



Figure 5 | Well elaborated and rudimentary Roof-Harvested Rainwater systems in the Mvog-Betsi neighbourhood.

The low proportion of houses having good gutter systems can be explained by the fact that the provision of gutters for rain water collection was not taken into consideration from the onset. Due to the increasing water stress situation in the neighbourhood, many inhabitants have resorted to adapt gutters to their roofs or to effectively integrate them during the construction of their houses.

The Mvog-Betsi neighbourhood fulfil all the criteria for the design of a RWH system in order to supplement the available water sources. These include; availability of sufficient quantity of rainwater during the water-rich seasons of the year, suitable roof collection surfaces and available space for storage reservoirs.

3.4. Design of roof-harvested rainwater system for the Mvog-Betsi neighbourhood

A typical Rainwater Harvesting System comprises the following components: roof catchment, gutters, downpipe, first flush chamber and storage tank. A schematic of the system is presented in Figure 7.

Among the above components, a storage tank is the most expensive and critical component. The capacity of the storage tank determines the cost of the system (Joleha *et al.* 2019).

In this study, we adopted the Graphing Method and the different steps of the procedure are presented below.

Step 1: Producing a histogram of the average monthly water supply with a line showing average monthly water demand.

Calculating household water demand, D.

The household water demand, $D = \text{Average daily water use (lpcd)} \times \text{Number of people living in the house} \times 365 \text{days/year}$

Average water demand/capita/day = 40 liters

Average number of persons/household = 7

Monthly water demand = $8.52 \text{ m}^3/\text{month}$



Figure 6 | Habitat types in the neighbourhood (a) Low standard house (b) Medium standard house (c) High standard house.

$$D = 40 \text{ litres/person/day} \times 7 \text{ persons} \times 365 \text{ days/year} = 102,200\text{L/year} = 102.2\text{m}^3/\text{year}$$

When divided by 12 (number of months in a year), a value of $8.52 \text{ m}^3/\text{month}$ is obtained.

Note: lpcd: liter per capita per day.

Determining household rainwater supply, Q

Rainwater supply Q (m^3/month) = precipitation P (m/month) \times catchment area A (m^2) \times runoff coefficient C

$$Q_{\text{September}} = 0.5117\text{m} \times 48\text{m}^2 \times 0.8 = 19.65\text{m}^3$$

$$Q_{\text{October}} = 0.61952\text{m} \times 48\text{m}^2 \times 0.8 = 23.79\text{m}^3$$

$$Q_{\text{November}} = 0.2503\text{m} \times 48\text{m}^2 \times 0.8 = 9.61\text{m}^3$$

$$Q_{\text{September–November}} = 53.05\text{m}^3$$

Note: The average surface area of the roofs of the houses in the neighborhood is 48 m^2

Figure 8 below shows the histogram of the average monthly water supply with a line showing average monthly water demand.

Step 2: Producing the calculations of cumulative water supply and demand on a table.

Table 2 below present water supply by rainfall for the months of September, October and November and water demand of the sampled population.

It can be observed that the minimum storage requirement (27.49 m^3) is greater than the total water demand (25.56 m^3) for that period of time (i.e, $Q' \geq D$) (Figure 8). This fulfils the basic assumption is that the storage capacity should be at least equal

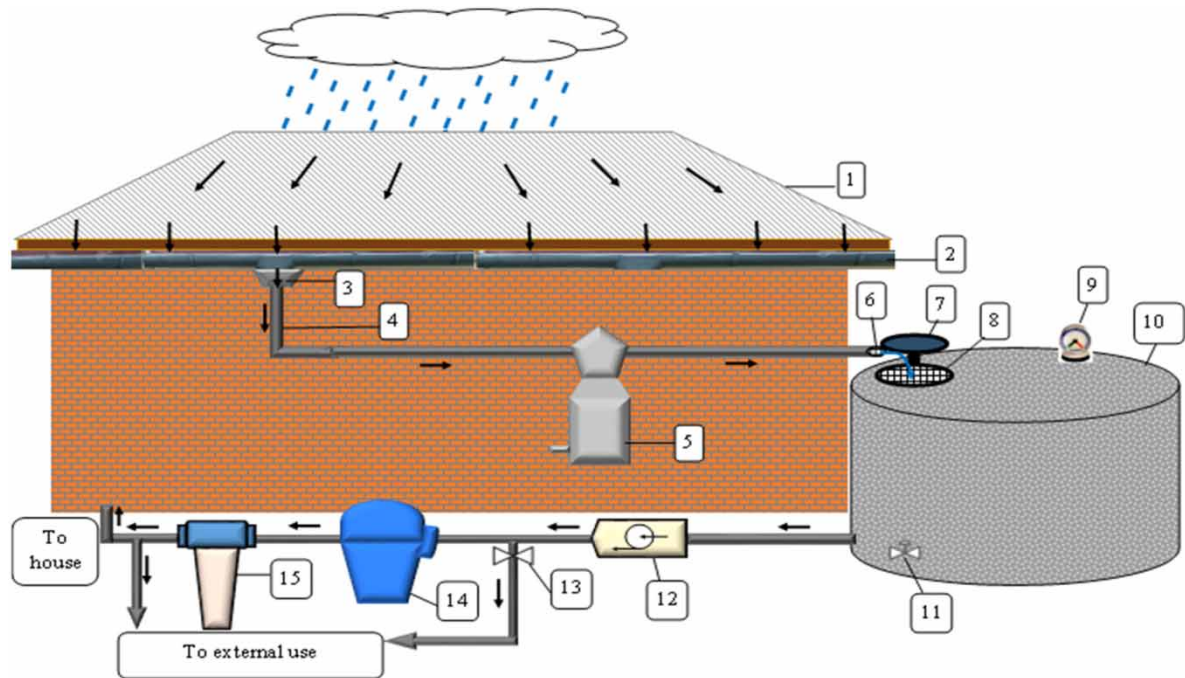


Figure 7 | Roof-harvested rainwater system for the Mvog-Betsi neighborhood. Where, 1 = roof surface; 2 = semi-circular PVC gutter; 3 = gutter outlet to direct RW to downpipe; 4 = PVC down pipe directs RW to first flush system; 5 = first flush device to divert unwanted materials from roof; 6 = pipe screen to further reduce entry of debris in the tank; 7 = tank clasp to close the tank entrance when needed; 8 = tank screen to prevent entry of pests and mosquitoes; 9 = water level indicator to help monitor water usage; 10 = rainwater tank for rainwater storage; 11 = globe tap for water use directly from the tank; 12 = pump (if required) to distribute water into and out of the house; 13 = gate valve to regulate flow of water out; 14 = filter to remove unwanted particles and microorganisms; 15 = disinfection unit where filtered water is disinfected using UV light.

Average monthly water supply and demand

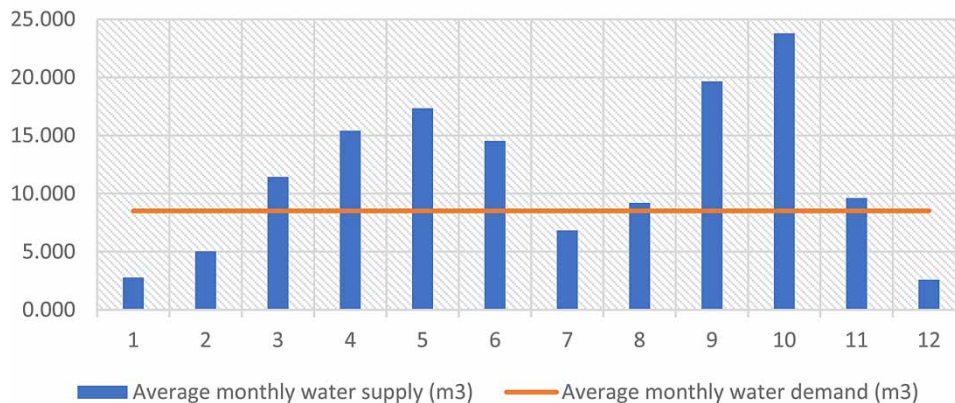


Figure 8 | Average monthly rainwater supply and population's demand.

to the total water demand during the dry months ($Q' \geq D$) in order that demand is met by supply (CAWAST 2011). Therefore, a minimum storage of 27 m^3 is required for storing water during the long dry season. A cylindrical shaped tank with the following dimensions; Volume, $V = 27 \text{ m}^3$; Height, $H = 2 \text{ m}$ (chosen); Diameter, $d = 4.15 \text{ m}$; thickness of wall = 15 cm (Where, Volume of cylinder, $V = \pi r^2 h$) meets the design specifications.

Table 2 | Cumulative supply for the months of September, October and November, and demand during the dry season

Month	P (mm)	Supply, Q (m ³)	Cum. Supply (m ³)	Water dd. (m ³)	Cum. Water dd. (m ³)	Storage requirement, Q' (m ³)
September	511.75	19.65	19.65	8.52	8.52	11.13
October	619.52	23.79	43.44	8.52	17.04	26.40
November	250.30	9.61	53.05	8.52	25.56	27.49
Total	1,381.57	53.05		25.56		

Note: P, precipitation; cum., cumulative; dd., demand.

3.5. Other system components' design

The other components of the RWH system (first flush system, filters and gutters) were designed as follows. The first flush systems will constitute a floating ball device for the high and medium standard habitations, and a self-cleaning screen at the tank inlet, inclined at an angle of 60° to the tank inlet hole for the low standard habitations. According to Cunliffe (1998), for average roof catchments 20–25 liters of rainwater could be diverted or discarded as first flush to maintain water quality. If a volume of 0.5 liter is diverted per square metre as first flush, therefore, for a catchment area of 48 m² a first flush of 24 liters will be diverted. The selected filter for the high and medium standard houses is the hydrocyclone rainy FL 200 filter, while the sand charcoal gravel filter is employed for the low standard houses. The gutters' dimensions and configuration were chosen based the specifications proposed by Thomas & Martinson (2007). The gutters will be semi-circular shaped and made of plastic – PVC (polyvinyl chloride) as they are cheap to purchase, easiest to clean and locally available already manufactured. The gutters' dimensions (size) and configurations can be chosen based on the parameters presented in Table 3.

The average roof area for our study area is 48 m², and this can be approximated to 46 m² and thus the recommendations for gutter sizes in Table 3 can be conveniently adopted. From Table 3, for a roof area of 46 m², a semi-circular gutter of width 90 mm and a downpipe of 40 mm as external diameter is recommended.

3.6. Cost estimations for installation of the RWH system

Table 4 below presents the cost estimation for installation of the RWH system for the different types of habitats in the study area.

It can be seen from the above tables that the cost estimate for the installation of RWH systems in the neighbourhood is least costly for the low standard habitations. Low standard houses make 52% of the neighborhood and 72% of the population are ready to adopt RWH as a supplement to their water needs. Of this 72%, 81% are willing to financially participate to up to 40% of the budget for their individual households (the remaining 60% provided by government as subvention). RWH can effectively serve as a water supply supplement in the Mvog-Betsi neighborhood but its promotion is subject to government support. In developing countries, many urban and rural households are below the poverty line and cannot afford the installation of a rainwater harvesting systems (Mwenge *et al.* 2007; de Kwaadsteniet *et al.* 2013). Other challenges in the widespread acceptance of these systems include socioeconomic pressure, lack of clear rainwater usage legislation in many countries, and need for national management organizations that coordinates the expansion of roof rainwater harvesting (Mwenge & Taigbenu 2011; de Kwaadsteniet *et al.* 2013). The sustainability of the rainwater system can also only be achieved when all the physical attributes (location and rainfall) and the socioeconomic attributes are taken into account during the design of such a system (Mwenge *et al.* 2007).

Table 3 | Recommended gutter sizes

Area of roof served by one gutter (m ²)	10	13	17	21	29	34	40	46	66
Semi-circular or trapezoidal gutter: Recommended width in mm	50	55	60	65	75	80	85	90	100
Recommended down-pipe size (outside diameter in mm)	15	20	25	25	32	32	40	40	40

Source: Thomas & Martinson (2007).

Table 4 | Cost estimation for the high, medium and low standard habitations

S No.	Part	Units required for HSH, MSH and LSH	Cost per unit (XAF) for HSH	Cost per unit (XAF) for MSH	Cost per unit (XAF) for LSH
1	PVC circular pipe for gutter (3.5")	1 each	2500	2500	2500
2	PVC pipe (ø1.6")	2 each	950	950	950
3	90° Bends (ø 1.6")	6 each	800	800	800
4	First flush diverter	1 each	15000	15000	Can be locally made
5	Tank screen on opening of manhole and insect proof screen at all pipe end to tank	3 each	2075	1500	1000
6	Cement bags	10, 8, 8	4450	4450	4450
7	Rebar-iron rods for reinforcement (ø 8 mm)	8 rods each	2500	2500	2500
8	Sand (wheelbarrows)	12 wheelbarrows each	1500	1500	1500
9	Gravel	16 wheelbarrows each	1800	1800	1800
10	Fastening metal wire	5 rolls each	1000	1000	1000
11	Sikalite waterproofing additives	8, 6, 6 sachets	1550	1550	1550
12	HDPE inner tank lining	1 (43 m ²) each	500/m ²	500/m ²	500/m ²
13a	Hydrocyclone filter	1 each for the HSH and MSH	30055	30055	–
13b	Sand-charcoal-gravel filter	1 each for the LSH and/or MSH	–	Can be locally made	Can be locally made
14	Water level indicator	1 each for HSH and MSH	20350	10000	–
15	Disinfection unit	1 each	22080	15400	15400
16	Pump (if needed)	1 each	14300	14300	–
17	Labour cost (XAF)	–	30% of project cost (267410) = 80223	30% of project cost (236655) = 70996.5	30% of project cost (165800) = 49740
18	Transport cost (XAF)	–	20000	20000	15000
	Total cost (XAF)	–	367633 (\$668)	327651.5 (\$596)	230540 (\$419)

Where, HSH, High Standard Habitations; MSH, Medium Standard Habitations; LSH, Low Standard Habitations.

4. CONCLUSIONS

Roof-harvested rainwater can serve as a supplement to water supply to the Mvog-Betsi population. There is enough available harvestable rainfall in the region, the rainwater chemistry is good and the monthly harvestable rainwater supply surpasses monthly population's water demand. There is a potential public health risk associated with using the untreated rainwater as potable water due to microbiological contamination. The rain water needs to be disinfected before consumption as potable water. To promote the adoption of this technology, new water legislation around the adoption of RWH for drinking purposes needs to be put in place by the Ministry incharge of the management of water resources in Cameroon.

DATA AVAILABILITY STATEMENT

All relevant data are included in the paper or its Supplementary Information.

REFERENCES

Abbasi, T. & Abbasi, S. A. 2011 Sources of pollution in rooftop rainwater harvesting systems and their control. *Critical Reviews in Environmental Science and Technology* **41**, 2097–2167.

- ANOR 2003 Cameroon drinking water quality norms (NC 207: 2003-02) Agence Nationale des Normes et Qualité, Yaounde.
- Antoniou, G., Kathijotes, N., Angelakis, A. N. & Spyridakis, D. S. 2014 Historical development of technologies on water resources management and rainwater harvesting in the Hellenic civilizations. *International Journal of Water Resources Development* **14** (8), 1–14.
- Centre for Affordable Water and Sanitation Technology (CAWST) 2011 *Introduction to Household Rainwater Harvesting*. Calgary, Alberta, T2A 6K4, Canada.
- Cunliffe, D. 1998 *Guidance on the Use of Rainwater Tanks. National Environmental Health Forum Monographs. (Public and Environmental Health Service, Ed.)*. Water Series 3.
- de Kwaadsteniet, M., Dobrowsky, P. H., van Deventer, A., Khan, W. & Cloete, T. E. 2013 Domestic rainwater harvesting: microbial and chemical water quality and point-of-use treatment systems. *Water Air Soil Pollution* **224**, 1629. doi:10.1007/s11270-013-1629-7.
- ERA (Environnement, Recherche et Action au Cameroun) 2013 *Rapport final du recensement de la population du quartier EBA'A*. ERA-CAMEROUN, Yaoundé, Cameroun.
- Fujioka, R. S. 1994 Guidelines and microbial standards for cistern waters. In: *Proceedings of the 6th International Conference on Rainwater Catchment Systems, Nairobi, Kenya* (Bambrah, G. K., Otieno, F. O. & Thomas, D. B., eds). pp 393–398.
- GMUS. 2008 *Avant-projet détaillé du mini-réseau d'eau d'Eba'a (Detailed Preliminary Project Design of the Eba'a Mini Water Network)*. Report of Technical Thesis, GMUS, Yaoundé, Cameroun, p. 26.
- GWP & MINEE 2009 *Etat des lieux du secteur de l'eau au Cameroun: connaissances et usages des ressources en eau (State of the Water Sector in Cameroon: Knowledge and Uses of Water Resources)*. Report of the Global Water Partnership, Yaoundé, Cameroun.
- Haut, B., Zheng, X.-Y., Mays, L., Han, M., Passchier, C. & Angelakis, A. N. 2015 Evolution of rainwater harvesting and heritage in urban areas through the millennia: a sustainable technology for increasing water availability. In: *Water and Heritage: Material, Conceptual, and Spiritual Connections* (Willems, W. J. H. & van Schaik, H. P. J., eds). Sidestone Press. The Netherlands, ch. 3, pp. 37–56.
- International Rainwater Catchment Systems Association (IRCSA) 2021 Domestic roofwater harvesting for Low Income Countries. Available from: <http://www.ircsa.org/factsheets/lowincome.htm> (accessed May 2021).
- Joleha, Mulyadi, A. & Wawan 2019 Application of rainwater harvesting technology to supply sustainable domestic water. *International Journal of Electrical, Energy and Power System Engineering (IJEPPSE)* **2** (1), 10–14. e-ISSN: 2654-4644.
- Malley, Z. I. U., Taeb, M., Matsumoto, T. & Takeya, H. 2009 Environmental sustainability and water availability: analyses of the scarcity and improvement opportunities in the Usangu plain, Tanzania. *Physics Chemistry of the Earth, Parts A/B/C* **34**, 3–13. doi:10.1016/j.pce.2008.02.034.
- Mosley, L. 2005 Water Quality of Rainwater. Miscellaneous Report 579, SOPAC. South Pacific Applied Geoscience Commission (SOPAC) Miscellaneous Report 579. Available from: www.sopac.org/data/virlib/MR/MR0579.pdf
- Mwenge Kahinda, J. & Taigbenu, A. E. 2011 Rainwater harvesting in South Africa: challenges and opportunities. *Physics and Chemistry of the Earth* **36**, 968–976.
- Mwenge Kahinda, J., Taigbenu, A. E. & Boroto, R. J. 2007 Domestic rainwater harvesting to improve water supply in rural South Africa. *Physics and Chemistry of the Earth* **32**, 1050–1057.
- Ndongo, B., Ngnikam, E. & Mbouendeu, S. 2012 Analyse des services d'eau non conventionnels dans les quartiers à habitat spontané : cas du quartier EBA'A dans la périphérie de la ville de Yaoundé (région du centre au Cameroun). *Revue des Sciences de L'eau* **25** (2), 153–163. doi:10.7202/1011605ar.
- Okpoko, E., Egboka, B., Anike, L. & Okoro, E. 2013 Rainfall harvesting as an alternative water supply in water stressed communities in Aguata-Awka Area of Southeastern Nigeria. *Environmental Engineering Research* **2** (18), 95–101.
- Pazwash, H. 2016 *Urban Storm Water Management*. CRC Press, Taylor & Francis, Boca Raton, FL, USA.
- Steven, D., O'Brien, E. & Bruce Jones, D. 2014 *The New Politics of Strategic Resources: Energy and Food Security Challenges in the 21st Century*. Brookings Institution Press, p. 221.
- Suchel, J. B. 1998 *Les climats du Cameroun (The Climates of Cameroon)*. State PhD Thesis, University of Saint-Etienne, France, 1 p. 188.
- Sustainable Earth Technologies, Inc. 1999 *Rainwater Harvesting*. Available from: www.sustainable.com.au/rainwater.html (accessed May 2021).
- Thomas, T. H. & Martinson, D. B. 2007 *Roofwater Harvesting: A Handbook for Practitioners* (Centre, I. I., ed.). Technical Paper Series (no.49), Delft, The Netherlands.
- United Nations Environmental Programme 1997 Rainwater Harvesting from rooftop Catchments. Retrieved from The Sourcebook of Alternative Technologies for Freshwater Augmentation in Latin America and the Caribbean.
- WHO and UNICEF 2012 Progress on drinking water and sanitation. 2012 Update WHO/UNICEF Joint Monitoring Programme for Water Supply and Sanitation, WHO Library Cataloguing-in-Publication Data.
- WHO/UNICEF Joint Monitoring Program (JMP) for Water Supply, Sanitation and Hygiene, the 2015 Progress Update and MDG Assessment.
- WHO (World Health Organization) 2004 *Guidelines For Drinking-Water Quality. Section 11.6.1, Total Coliform Bacteria*. World Health Organization, Geneva.
- WHO (World Health Organization) 2009 *Potassium in Drinking-Water. Background Document for Development of WHO Guidelines for Drinking-Water Quality*. World Health Organization, Geneva.
- Yannopoulos, S. I., Antoniou, M., Kaiafa-Saropoulou, M. & Angelakis, A. N. 2016 Historical development of rainwater harvesting and use in Hellas: a preliminary review. *Water Science & Technology: Water Supply* **17** (4), 1022–1034.